




Инструкция по использованию
бас-гитарного звукоснимателя
EMG PHZ

(на английском языке)

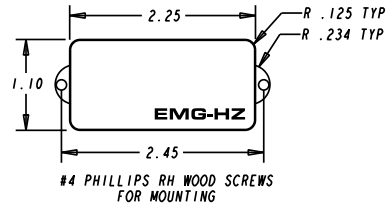

INSTALLATION INFORMATION

EMG-HZ Model:
P-HZ

Specifications:

Model:	P-HZ
Logo Color	Silver
Inductance (Henries)	3.0
DC Resistance (K ohms)	8.0
Resonant Frequency (1)	2550
Resonant Frequency (2)	4700
Impedance @ Resonance (K ohm)(1)	48.0

Notes:

- (1) Loaded with 250K or 500K V @ T w/20' cable (800pf)
- (2) Loaded with 1 Meg ohm/47pf

Each pickup includes:

4 pin cable pre-wired in Humbucking Series format.

Adjustment screws

IMPORTANT INSTALLATION NOTES:

Recommended overall string width: 2.40"


Each pickup is mounted with 2 screws centered at each end.

The P-HZ is recommended for 4 string basses.




EMG-HZ Warranty:


All EMG-HZ Pickups and accessories are warranted for a period of two years. This warranty does not cover failure due to improper installation, abuse, or damage. If it any time a pickup fails to work, return it postage prepaid with proof of purchase. If upon examination the pickup is determined to be defective, a replacement will be mad at no charge. Warranty replacement products are covered under this same warranty. This warranty covers only those pickups and accessories sold by authorized EMG Dealers.

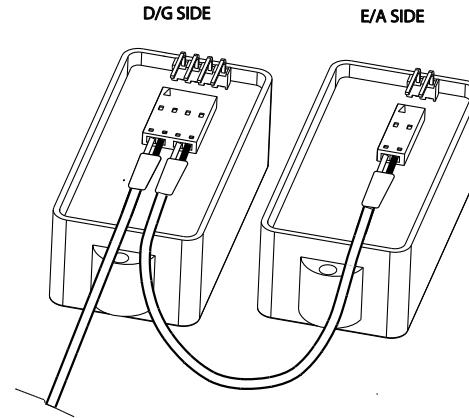

EMG-P-HZ Diagram 1
1 Volume only

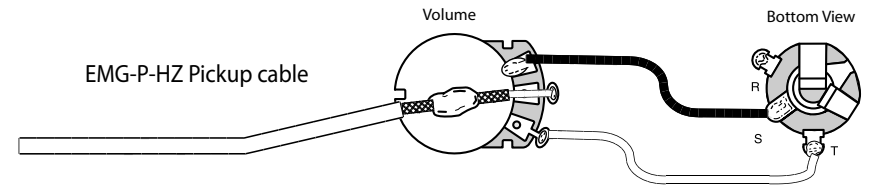

EMG-P-HZ Diagram 2
1 Volume, 1 Tone

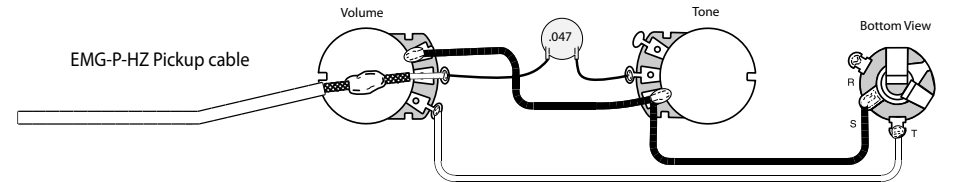

EMG-P-HZ Diagram 3
2 Volume, 1 Tone
(each Volume is independent)

